

NONTROP KR 291

Lubricating grease for gears and eyepieces



Benefits for your application

- For medium to high temperatures
- Good dampening effect
- Good adhesion

Description

NONTROP KR 291 is a dampening grease based on mineral oil and silicate.

Application

NONTROP KR 291 is a dampening grease for small gears in precision engineering, e.g. threaded spindles, adjustment gears, lens threads.

Application notes

NONTROP KR 291 can be applied by means of brush or spatula. The friction points should be metallically blank and free of contamination.

Material safety data sheets

Material safety data sheets can be requested via our website www.klueber.com. You may also obtain them through your contact person at Klüber Lubrication.


Pack sizes	NONTROP KR 291
Can 1 kg	+
Bucket 25 kg	+

Product data	NONTROP KR 291
Article number	014026
Chemical composition, thickener	silicate
Chemical composition, type of oil	mineral oil
Lower service temperature	-10 °C / 14 °F
Upper service temperature	140 °C / 284 °F
Colour space	brown
Density at 20 °C	approx. 0.92 g/cm³
Worked penetration, DIN ISO 2137, 25 °C, lower limit value	250 x 0.1 mm
Worked penetration, DIN ISO 2137, 25 °C, upper limit value	300 x 0.1 mm
Minimum shelf life from the date of manufacture - in a dry, frost-free place and in the unopened original container, approx.	24 months



NONTROP KR 291

Lubricating grease for gears and eyepieces

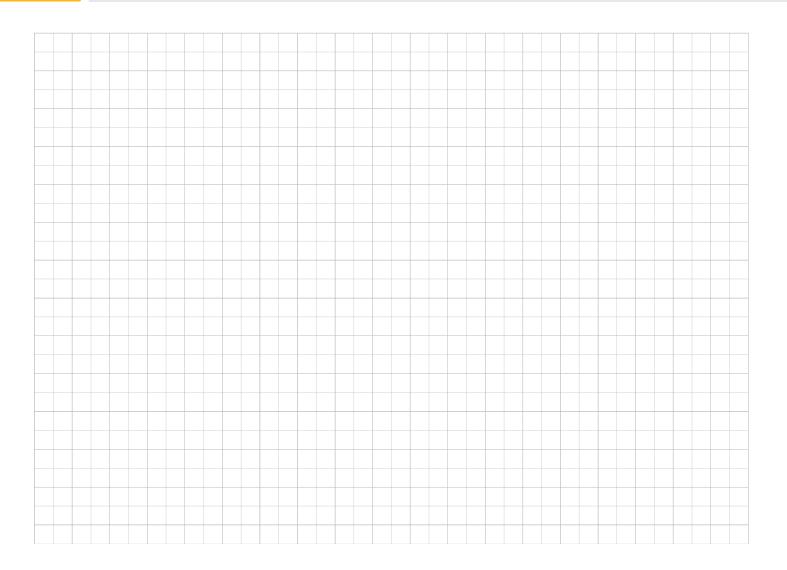

Klüber Lubrication – your global specialist

Innovative tribological solutions are our passion. Through personal contact and consultation, we help our customers to be successful worldwide, in all industries and markets. With our ambitious technical concepts and experienced, competent staff we have been fulfilling increasingly demanding requirements by manufacturing efficient high-performance lubricants for more than 80 years.

Klüber Lubrication München SE & Co. KG / Geisenhausenerstraße 7 / 81379 München / Germany / phone +49 89 7876-0 / fax +49 89 7876-333.

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.

Publisher and Copyright: Klüber Lubrication München SE & Co. KG. Reprints, total or in part, are permitted only prior consultation with Klüber Lubrication München SE & Co. KG and if source is indicated and voucher copy is forwarded.